



LED Lighting



Multiple recessed linear light

■ SNAP TRIM



WH



SN



BK




■ CRI & Power & Lumen
90 8W 450-500lm


■ CCT(CCT Selectable)
2700K/3000K/3500K/4000K/5000K

■ Dimming
Triac dimming(120V)

■ Size



■ Splicing process

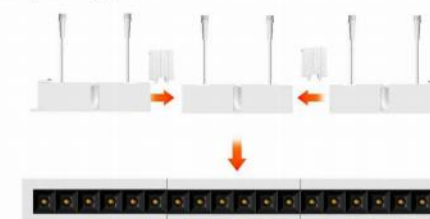



2" LED Downlight



■ ACCESSORIES AVAILABLE



208R



208H




208HAA

■ Power & Lumen

Square 9.5W 630lm
Round 9.5W 630lm

■ Size AxB inch(AxBmm)

Square $\Phi 3.15 \times 2.54$ inch($\Phi 80 \times 64.4$ mm)
Round $\Phi 3.07 \times 2.55$ inch($\Phi 78 \times 64.8$ mm)

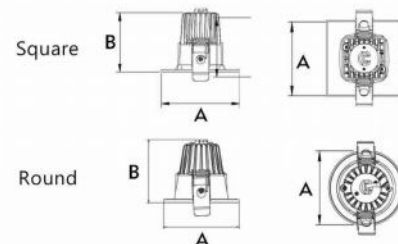

■ CCT(Single CCT)



2" LED Downlight




■ Model & Power & Lumen

Square 9.5W 630lm
Round 9.5W 630lm

■ Model AxB inch(AxBmm)

Square $\Phi 3.15 \times 2.54$ inch($\Phi 80 \times 64.4$ mm)
Round $\Phi 3.07 \times 2.55$ inch($\Phi 78 \times 64.8$ mm)

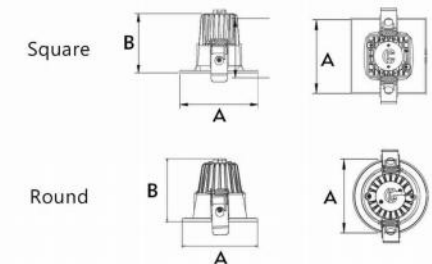

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K



■ SNAP TRIM



WH



BK



■ Size & Power & Lumen

2" Square 10W 800lm
2" Round 10W 800lm

■ CCT (CCT Selectable)


2700K/3000K/3500K/4000K/5000K

■ Dimming


Triac dimming(120V)

■ Size

Square



Round





LED Ceiling Light



■ SNAP TRIM



WH



SN



MO

■ Size & Power & Lumen

4"	10W	640lm
5" & 6"	15W	1000lm

■ Size AxBinch(AxBmm)

4"	Φ5.93 x 1.56 inch(Φ150.6 x39.6 mm)
5" & 6"	Φ7.41 x 1.69 inch(Φ188.2 x42.9 mm)

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K



LED Ceiling Light



■ Size & Power & Lumen


5"	10W	640lm
7"	13W	900lm

■ Size AxBinch(AxBmm)

5"	Φ5.35 x 1.13 inch(Φ136 x 28.7 mm)
7"	Φ7.91 x 1.13 inch(Φ201 x 28.7 mm)

■ CCT(CCT Selectable)

3000K/4000K/5000K





LED Ceiling Light

■ SNAP TRIM



WH



BK




■ Size & Power & Lumen

11"	16W	1500lm
15"	19W	2000lm

■ Size AxBinch(AxBmm)

11"	Φ11.02 x 0.98 inch(Φ280 x25 mm)
15"	Φ14.96 x 0.98 inch(Φ380 x25 mm)

■ CCT(CCT Selectable)
2700K/3000K/3500K/4000K/5000K





■ Size & Power & Lumen

3"(Flat Optic)	7W	500/600lm
3"(Reflector Optic)	7W	500lm
3.5"	7W	500/600lm
4"	7W	500/600lm

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

■ Size AxBinch(AxBmm)

3"(Flat Optic)"	4.23x2.25inch (107.5x 57.2 mm)
3"(Reflector Optic)	4.23 x2.25inch(107.5 x 57.2 mm)
3.5"	4.46x1.92inch(113.3 x 48.7 mm)
4"	5.11X1.92inch(129.8X48.7 mm)

■ Cut Hole inch (mm)

3"	3.46 inch(Φ88mm)
3.5"& 4"	3.86 inch(Φ98mm)



120V
AC

DAMP
LOCATION

CRI
≥90

DIM

ETL
Intertek

ENERGY STAR

T24

JAB

■ Size & Power & Lumen


3"	7W	500lm
3.5"	7W	500/600lm
4"	7W	500/600lm
6"	13.5W	800lm

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

■ Size AxBinch(AxBmm)

3"	Φ3.84 x 2.25 inch(Φ97.5x57.2mm)
3.5"	Φ4.63x1.92inch(Φ117.7 x48.7 mm)
4"	Φ5.10X1.92inch(Φ129.8X48.7 mm)
6"	Φ7.25x2.37inch(Φ183.40x61.82mm)



120-277V
AC

DAMP
LOCATION

CRI
≥90

DIM

ETL
Intertek

ENERGY STAR

T24

JAB

■ Size & Power & Lumen


3"	7W	500lm
3.5"	7W	500/600lm
4"	7W	500/600lm
6"	13.5W	800lm

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

■ Size AxBinch(AxBmm)

3"	Φ3.84 x 2.25 inch(Φ97.5x57.2mm)
3.5"	Φ4.63x1.92inch(Φ117.7 x48.7 mm)
4"	Φ5.10X1.92inch(Φ129.8X48.7 mm)
6"	Φ7.25x2.37inch(Φ183.40x61.82mm)





LED Wafer downlight



■ SNAP TRIM



■ Size & Power & Lumen

3"	8W	550lm
4"	10.5W	800lm
6"	13.5W	1000lm
8"	18W	1300lm

■ Size AxBinch(AxBmm)

3"	Φ3.35x0.75 inch(Φ85x19.05mm)
4"	Φ5.33x0.75 inch(Φ135.5x19.05mm)
6"	Φ7.36x0.75 inch(Φ187x19.05mm)
8"	Φ8.94x0.75 inch(Φ227x19.05mm)



■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

■ Cut Hole inch(mm)


3"	2.83 inch(Φ72 mm)
4"	4.25 inch(Φ108 mm)
6"	6.50 inch(Φ165 mm)
8"	8.27 inch(Φ210 mm)



LED Wafer downlight



■ SNAP TRIM

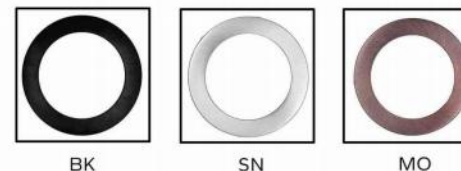


■ Size & Power & Lumen

3"	8W	550lm
4"	12W	1000lm
6"	15W	1500lm
8"	17W	1700lm

■ Size AxBinch(AxBmm)

3"	Φ3.35x0.75 inch(Φ85x19.05mm)
4"	Φ5.33x0.75 inch(Φ135.5x19.05mm)
6"	Φ7.36x0.75 inch(Φ187x19.05mm)
8"	Φ8.94x0.75 inch(Φ227x19.05mm)



■ CCT(CCT Selectable)


2700K/3000K/3500K/4000K/5000K

■ Dimming

Triac dimming(120V)

■ Cut Hole inch(mm)

3"	2.83 inch(Φ72 mm)
4"	4.25 inch(Φ108 mm)
6"	6.50 inch(Φ165 mm)
8"	8.27 inch(Φ210 mm)

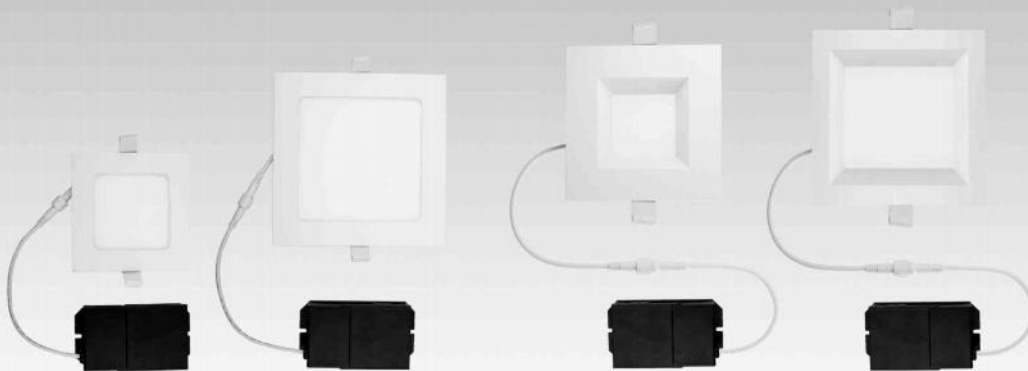

LED Wafer downlight Baffle/Smooth



■ Size & Power & Lumen

4"	10.5W	650lm
6"	13.5W	900lm
4"Baffle	10.5W	650lm
6"Baffle	13.5W	900lm

■ Size AxBinch(AxBmm)

4"	4.72x0.54 inch(120x13.72mm)
6"	6.89x0.54 inch(175x13.72mm)
4"Baffle	5.13x0.63 inch(130x16mm)
6"Baffle	7.13x0.63 inch(180x16mm)




■ Cut Hole inch(mm)

4"	4.25x4.25 inch(108x108 mm)
6"	6.25x6.25 inch(158x158 mm)
4"Baffle	4.25x4.25 inch(108x108 mm)
6"Baffle	6.50x6.50 inch(165x165 mm)

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

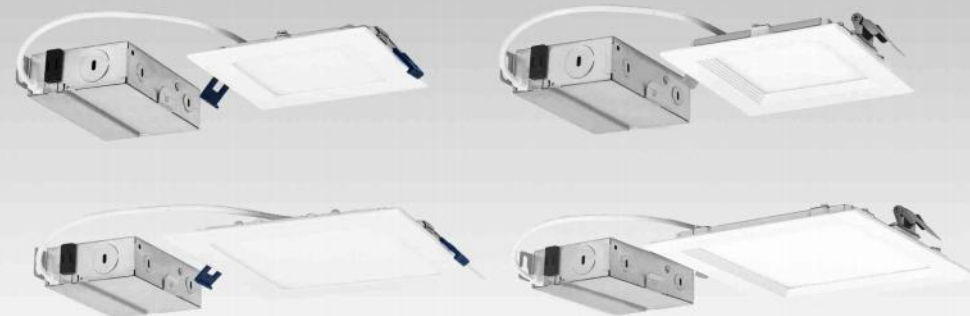

LED Wafer downlight Baffle/Smooth




■ Size & Power & Lumen

4"	12W	950lm
6"	15W	1200lm
4"Baffle	12W	850lm
6"Baffle	15W	1400lm

■ Size AxBinch(AxBmm)

4"	4.72x0.54 inch(120x13.72mm)
6"	6.89x0.54 inch(175x13.72mm)
4"Baffle	5.13x0.63 inch(130x16mm)
6"Baffle	7.13x0.63 inch(180x16mm)




■ Cut Hole inch(mm)

4"	4.25x4.25 inch(108x108 mm)
6"	6.25x6.25 inch(158x158 mm)
4"Baffle	4.25x4.25 inch(108x108 mm)
6"Baffle	6.50x6.50 inch(165x165 mm)

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

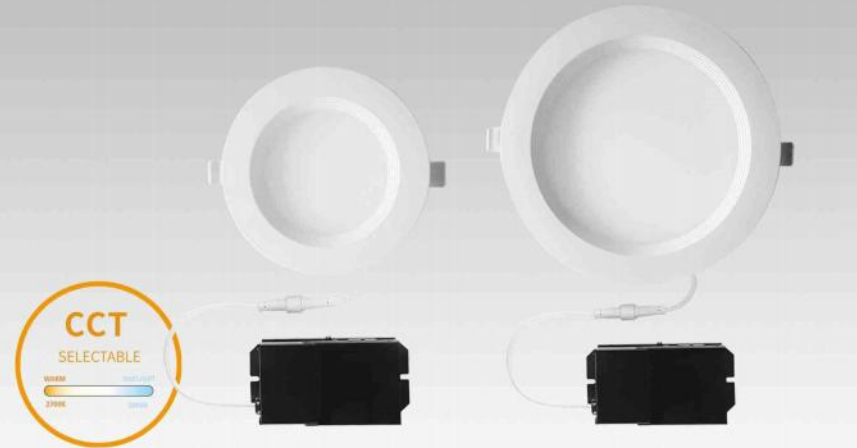

■ SNAP TRIM



■ Size & Power & Lumen


4"	10.5W	750lm
6"	13.5W	1000lm

■ Size AxBinch(AxBmm)


4"	Φ5.09x0.63 inch (Φ129.4*16mm)
6"	Φ7.10x0.63 inch (Φ180.4*16mm)

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K



■ SNAP TRIM

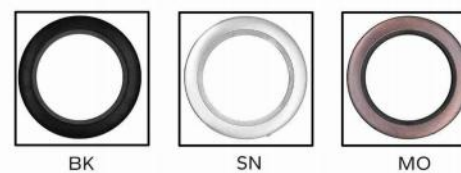

■ Size & Power & Lumen


4"	12W	1000lm
6"	15W	1500lm


■ Size AxBinch(AxBmm)

4"	Φ5.09x0.63 inch (Φ129.4*16mm)
6"	Φ7.10x0.63 inch (Φ180.4*16mm)

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K





LED Wafer Downlight (Nightlight)

■ SNAP TRIM



BK



SN



MO

■ Size & CRI & Power & Lumen

4"	90	10W	700lm
6"	90	13.5W	1000lm


■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K
Night light: 2000K





■ Size

4"



6"



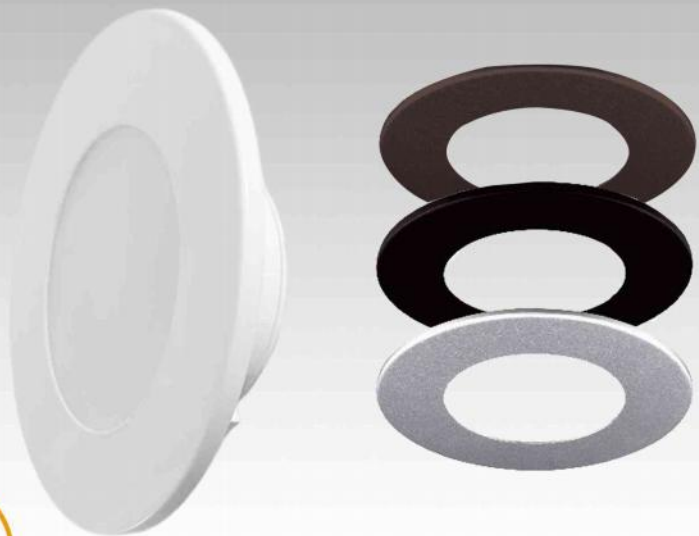

4" Multiple Application Recessed Light

■ SNAP TRIM



BK



SN



MO

■ Size & CRI & Power & Lumen




4" 90 7W 460lm

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K



■ Size

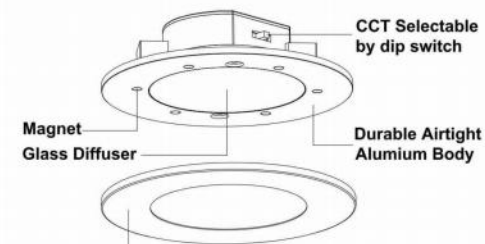


Interchangeable Magnetic Trims

for Your Option:

White/Black/Brushed Nickel/Red olive brown




■ SNAP TRIM

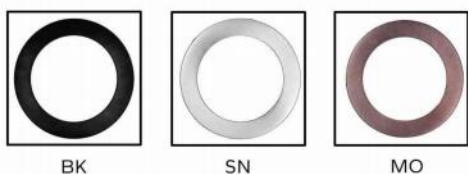

■ Size & CRI & Power & Lumen


4"	90	10W	700lm
6"	90	13.5W	1000lm

■ Size

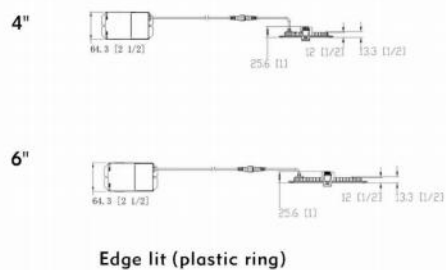


■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

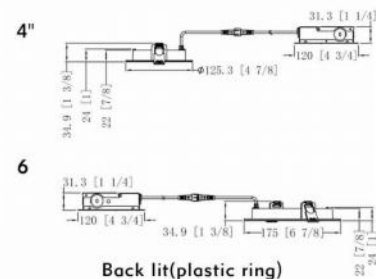


■ SNAP TRIM

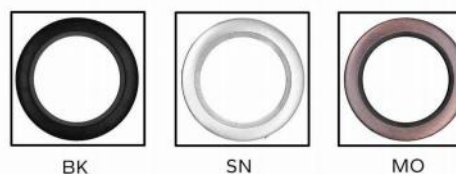

■ Size & CRI & Power & Lumen


4"	90	10W	700lm
6"	90	13.5W	1000lm

■ Size

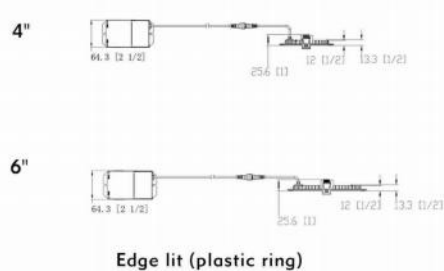

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

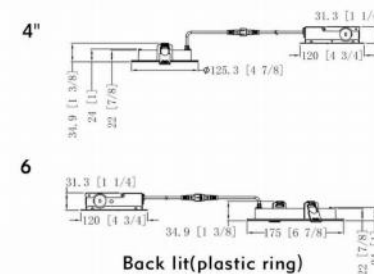



LED Wafer Downlight



■ ACCESSORIES AVAILABLE

For 4inch housing/6inch housing



■ SNAP TRIM



BK



SN




MO

■ Size & CRI & Power & Lumen

4"	90	9.5W	650lm
6"	90	12.5W	950lm


■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

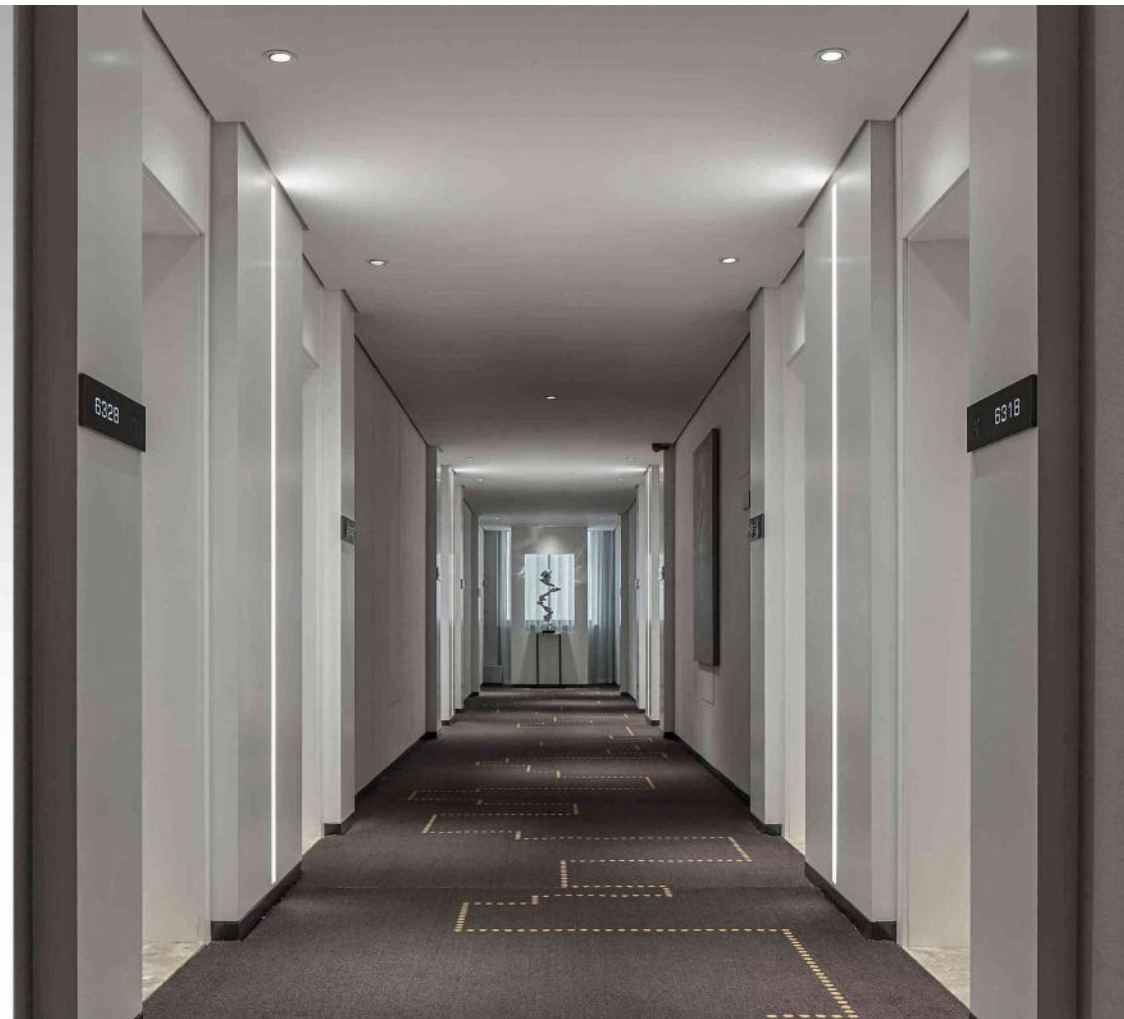


■ Size

4"



6"

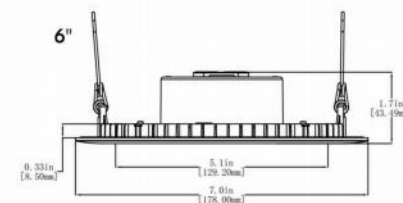



LED Retrofit Kit



■ **ACCESSORIES AVAILABLE**

For 4"/6" New construction or Remodel Housing



■ **Size & Power & Lumen**


4"	10W	600lm
6"	13W	800lm

■ **CCT(CCT Selectable)**

2700K/3000K/3500K/4000K/5000K

■ **Size AxBinch(AxBmm)**

4"	Φ5.2 x 2.22 inch(Φ132 x56.3 mm)
6"	Φ7.32 x 2.42 inch(Φ186 x61.7 mm)




LED Retrofit Kit



■ **ACCESSORIES AVAILABLE**

For 4"/6" New construction or Remodel Housing

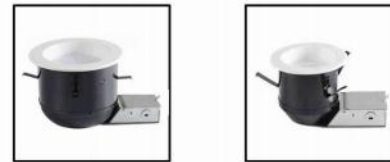

■ **Size & Power & Lumen**


4"	13W	1000lm
6"	18W	1500lm

■ **CCT(CCT Selectable)**

2700K/3000K/3500K/4000K/5000K

■ **Size AxBinch(AxBmm)**

4"	Φ5.2 x 2.87 inch(Φ132 x71.6 mm)
6"	Φ7.32 x 3.12 inch(Φ186 x77.8 mm)





New Retrofit Downlight(Plastic Ring)

Baffle/Smooth

■ ACCESSORIES AVAILABLE

For 4"/6" New construction or Remodel Housing



■ SNAP TRIM



BK



SN





MO



■ Size & CRI & Power & Lumen

4"	90	9W	620lm
6"	90	11.5W	820lm

■ Size

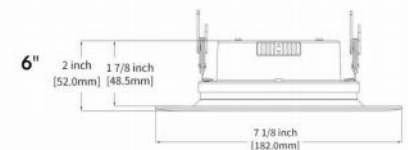

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K



Retrofit Downlight with Night Light Baffle/Smooth

■ ACCESSORIES AVAILABLE



■ SNAP TRIM




BK



SN





MO

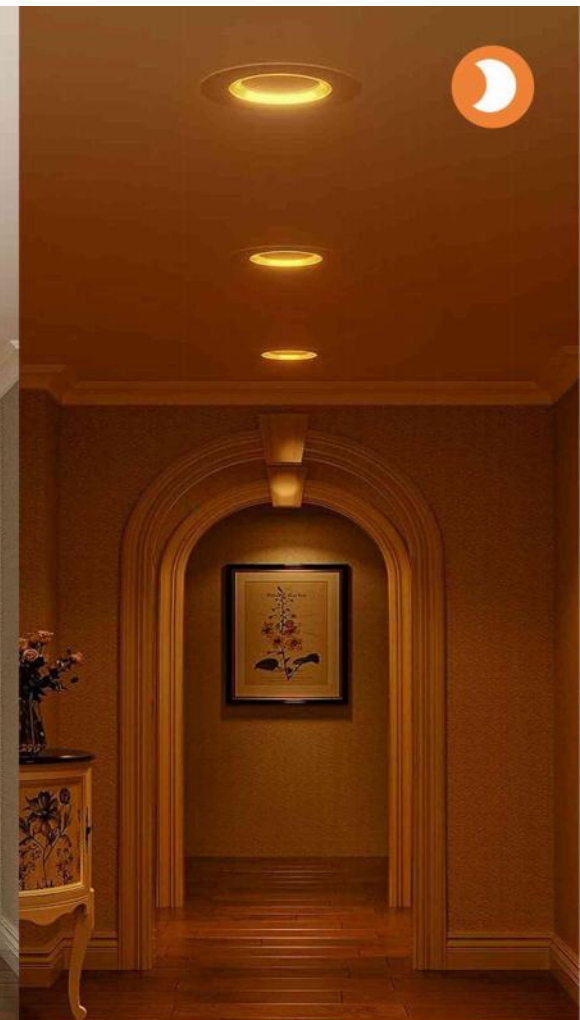

■ Size & CRI & Power & Lumen

4"	90	10W	700lm@4000K
6"	90	12W	900lm@4000K

■ Size

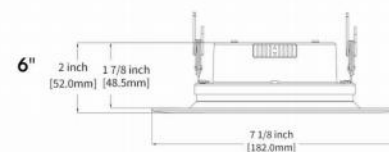

■ CCT(CCT Selectable)


2700K/3000K/3500K/4000K/5000K



New Retrofit Downlight(Plastic square) Baffle/Smooth

■ ACCESSORIES AVAILABLE


For 4"/6" New construction or Remodel Housing

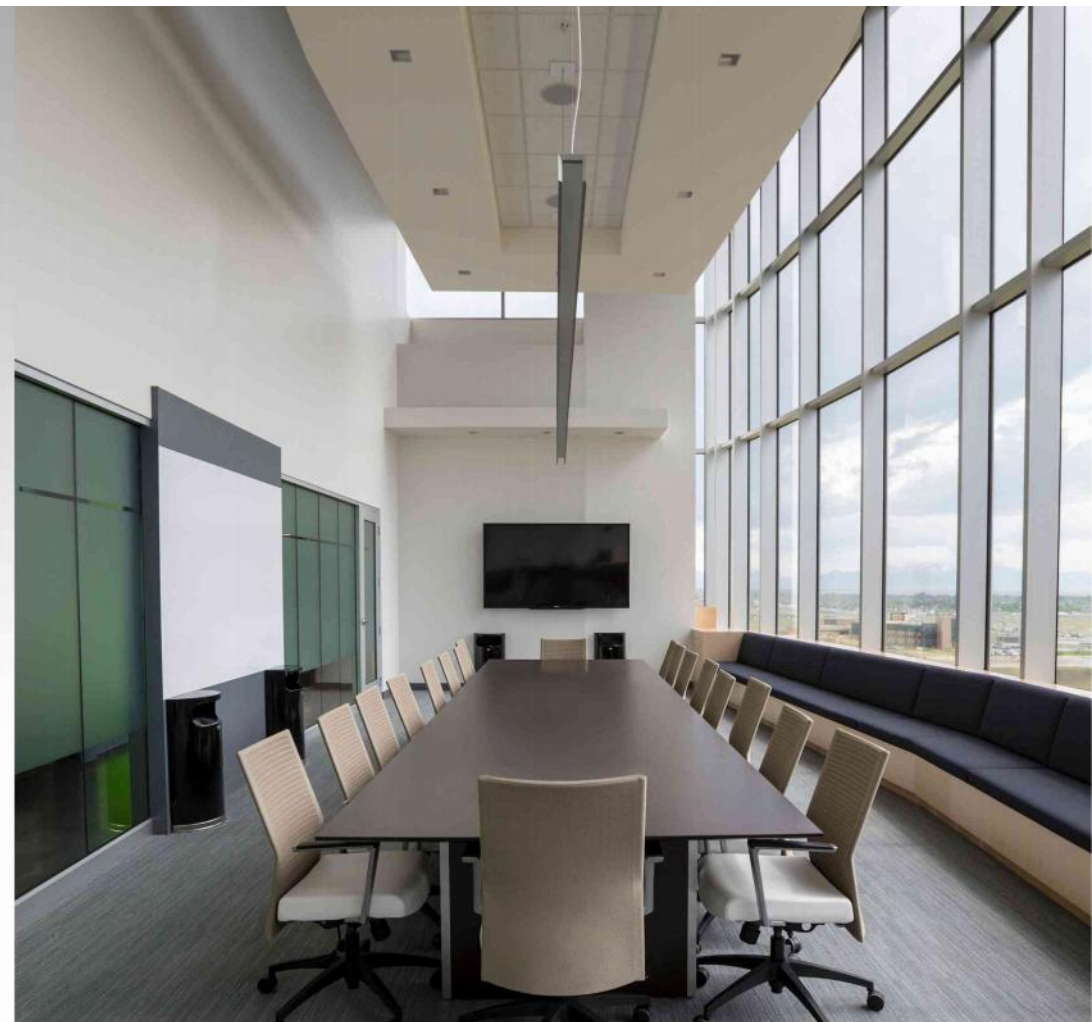

■ Size & CRI & Power & Lumen

4" 90 9W 620lm

■ Size

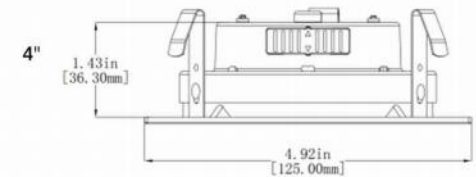

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K



Gimbal LED Recessed Adjustable Light Trim 4"/ 6"

■ Size & Power & Lumen & CRI

4"	8.5W	700lm	90
6"	11W	900lm	90

■ Product Size:

4"	Φ5 3/8" DIA * 1 1/8" H
6"	Φ7 1/8" DIA * 1 3/8" H


■ CCT

2700K/3000K/3500K/4000K/5000K






■ Size

4"



6"




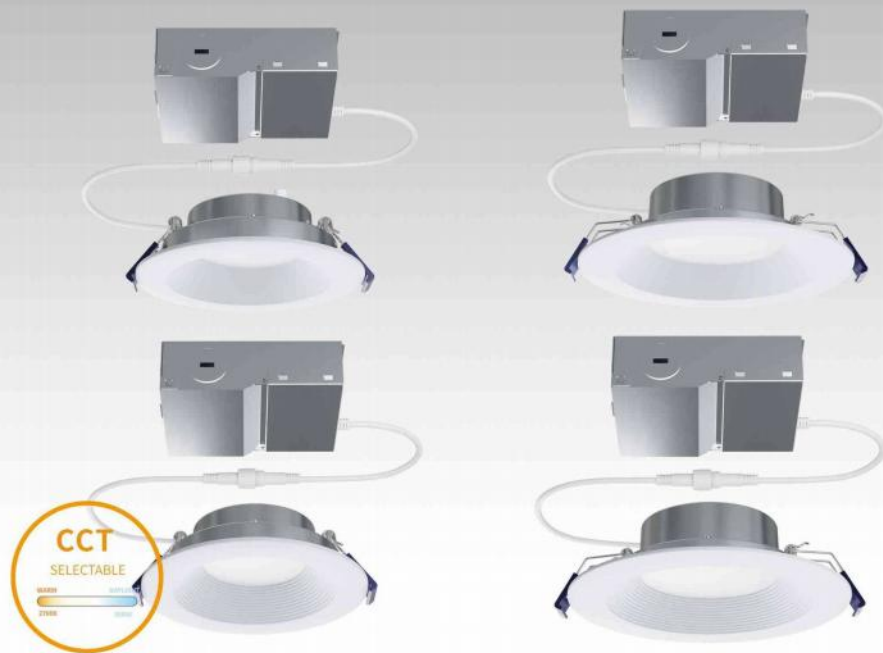

New Retrofit Downlight(Plastic Ring)

Baffle/Smooth

■ SNAP TRIM

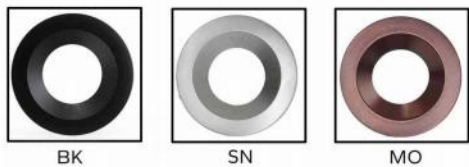


■ Size & CRI & Power & Lumen


4"	90	9W	620lm
6"	90	11.5W	820lm

■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K

■ Size

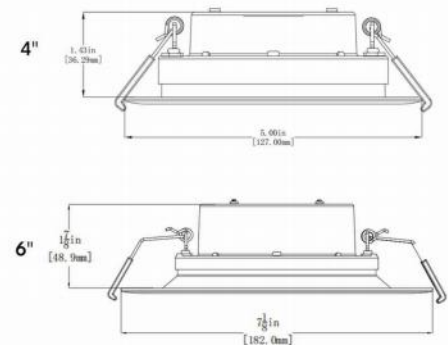

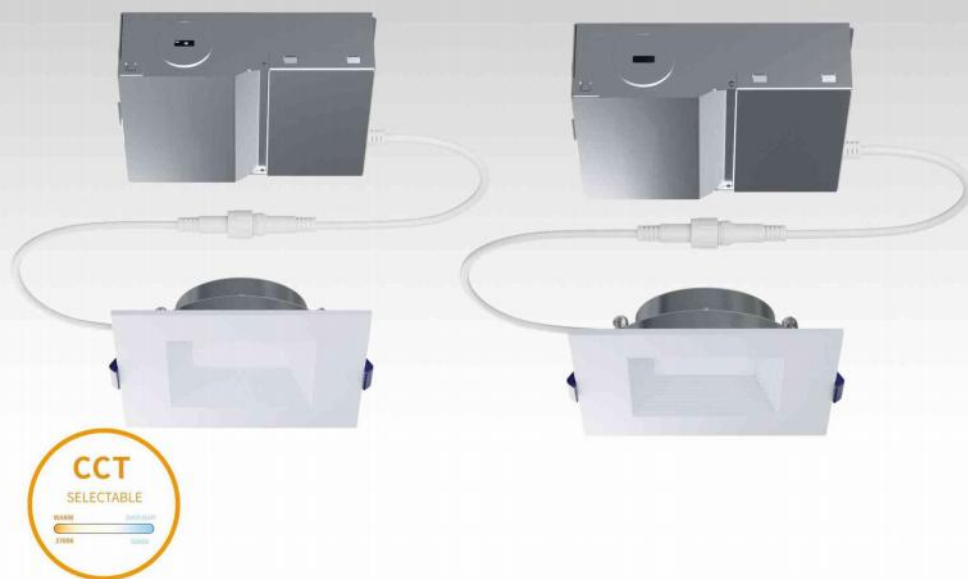


New Retrofit Downlight(Plastic square) Baffle/Smooth



■ Size & CRI & Power & Lumen
4" 90 9W 620lm

■ Siz

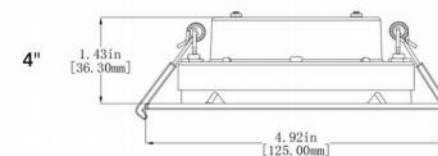

■ CCT(CCT Selectable)
2700K/3000K/3500K/4000K/5000K



**2 HOUR
FIRE RATING**
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101


Fire-rated Slim downlight

■ Size & CRI & Power & Lumen

4"	90	10W	750lm
6"	90	13W	1100lm



■ CCT(CCT Selectable)

2700K/3000K/3500K/4000K/5000K


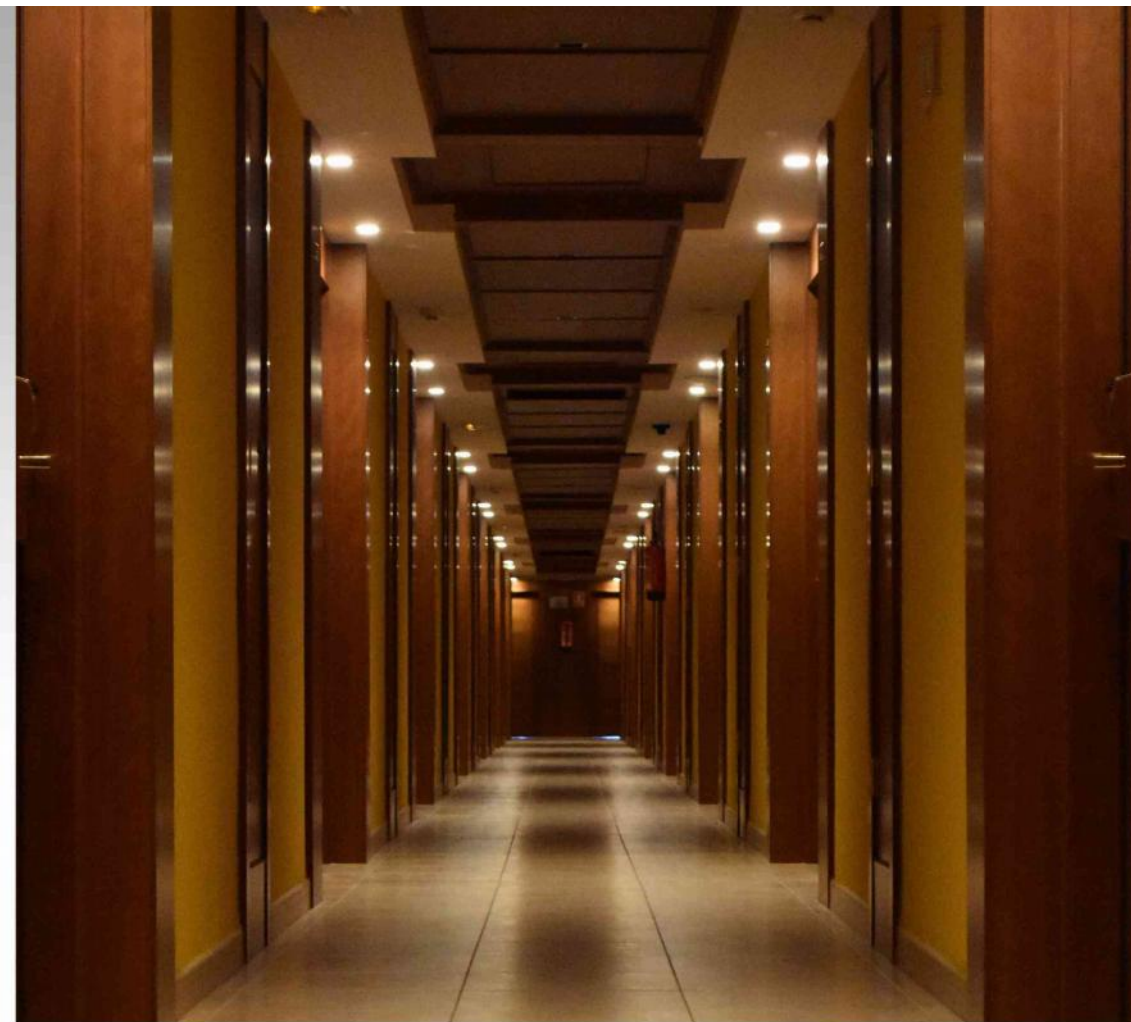


■ Size

4"



6"


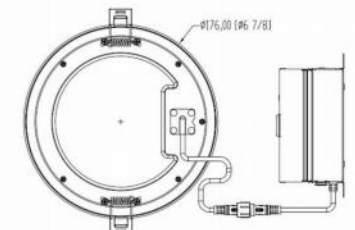





**2 HOUR
FIRE RATING**
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101









**2 HOUR
FIRE RATING**
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101

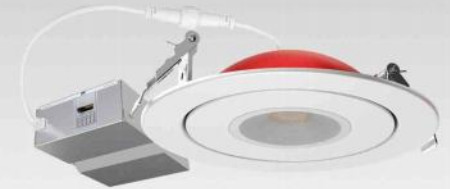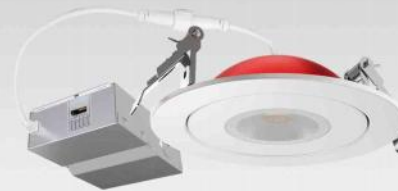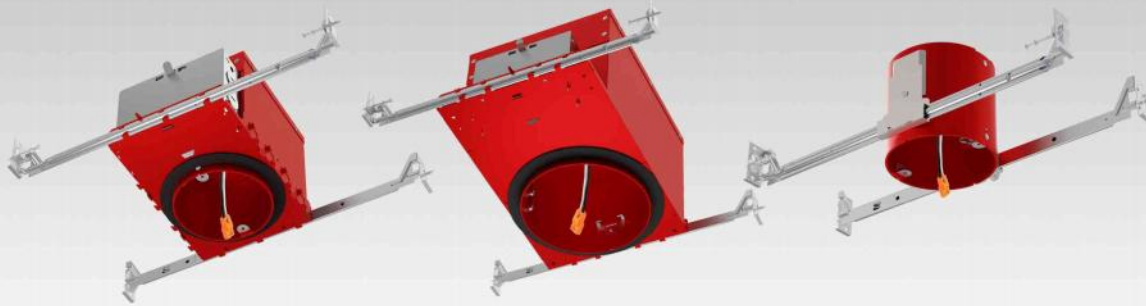

■ Size & Hole size & Maximum Watt

4"	4 1/4" 108mm	15W
6"	6 3/8" 162mm	20W


■ Size



■ Size & CRI & Power & Lumen


4"	90	9.2W	700lm
6"	90	12.2W	1100lm


■ Size

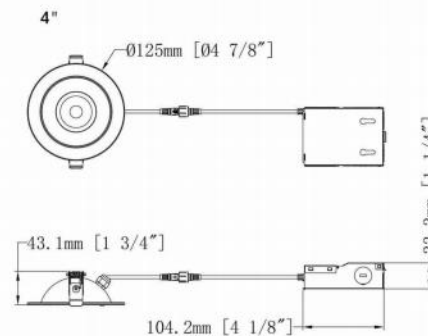

■ CCT

2700K/3000K/3500K/4000K/5000K

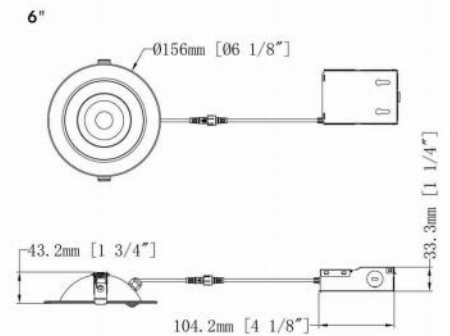


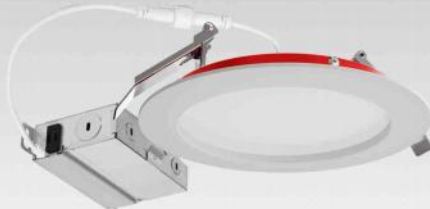

■ Size & CRI & Power & Lumen


4"	90	9.2W	700lm
6"	90	12.2W	1000lm

■ Size

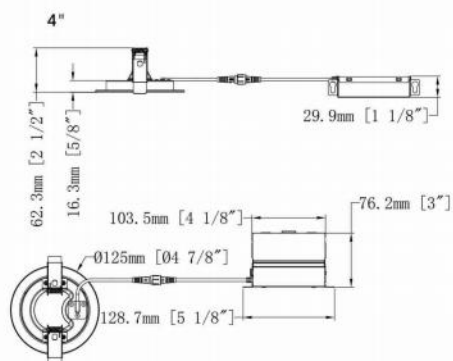

■ CCT


2700K/3000K/3500K/4000K/5000K

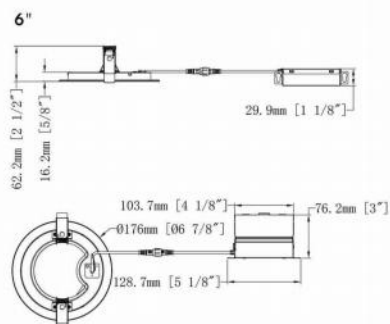

■ Size & CRI & Power & Lumen


4"	90	10W	600lm
6"	90	13W	800lm

■ Size

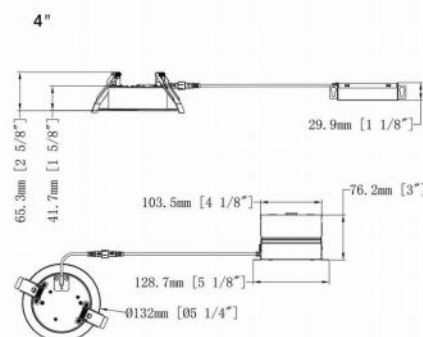

■ CCT

2700K/3000K/3500K/4000K/5000K

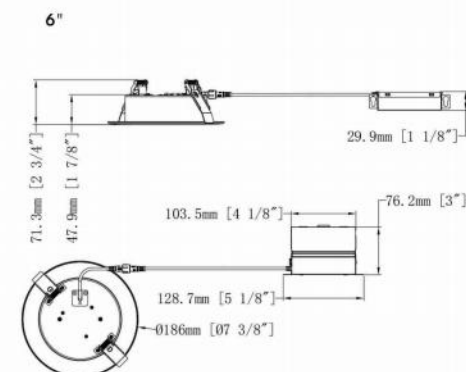




■ Hole size:
1 3/4" (46mm) or 2 1/8" (55mm)
or 2 3/8" (60mm) or 3" (75mm)
or 3 1/8" (80mm).

■ LED Trim kit MAXIMUM WATT:
7W or 9W or 12W

■ Size LxWxH Inch (LxWxH mm) :
14 5/8" L x 11 3/4" W x 4" H
(370.9x297.1x102.8mm)

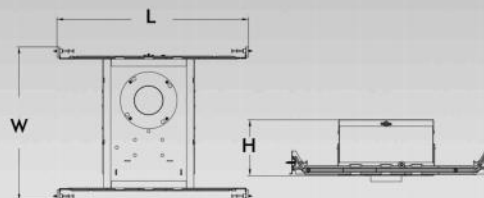


Miniature spotlight



Hole cut size
Φ 1 3/4" (46mm)



EDL207R-30K-24D-TP



EDL207R-30K-24D-YM



Lumens: 300lm
CCT: 3000K
CRI: 90
Input Voltage:
120-277V / 60/50Hz



Hole cut size
Φ 2 1/8" (55mm)



EDL205R-30K-24D-TP



EDL207R-30K-24D-TP



Lumens: 300lm
CCT: 3000K
CRI: 90
Input Voltage:
120-277V / 60/50Hz




Hole cut size
Φ 2 3/8" (60mm)



EDL207R-30K-24D-TP

EDL206R-30K-24D-YM



EDL204R-30K-24D-YM

EDL205R-30K-24D-YM



Lumens: 250lm
CCT: 3000K
CRI: 90
Input Voltage:
120-277V / 60/50Hz



Hole cut size
Φ 3" (75mm)



EDL301R-30K-24D-TP



EDL302R-30K-24D-TP



Lumens: 700/500lm
CCT: 3000K
CRI: 90
Input Voltage:
120-277V / 60/50Hz



Hole cut size
Φ 3 1/8" (80mm)




EDL301R-30K-24D-YM




EDL302R-30K-24D-YM



Lumens: 700/500lm
CCT: 3000K
CRI: 90
Input Voltage:
120-277V / 60/50Hz

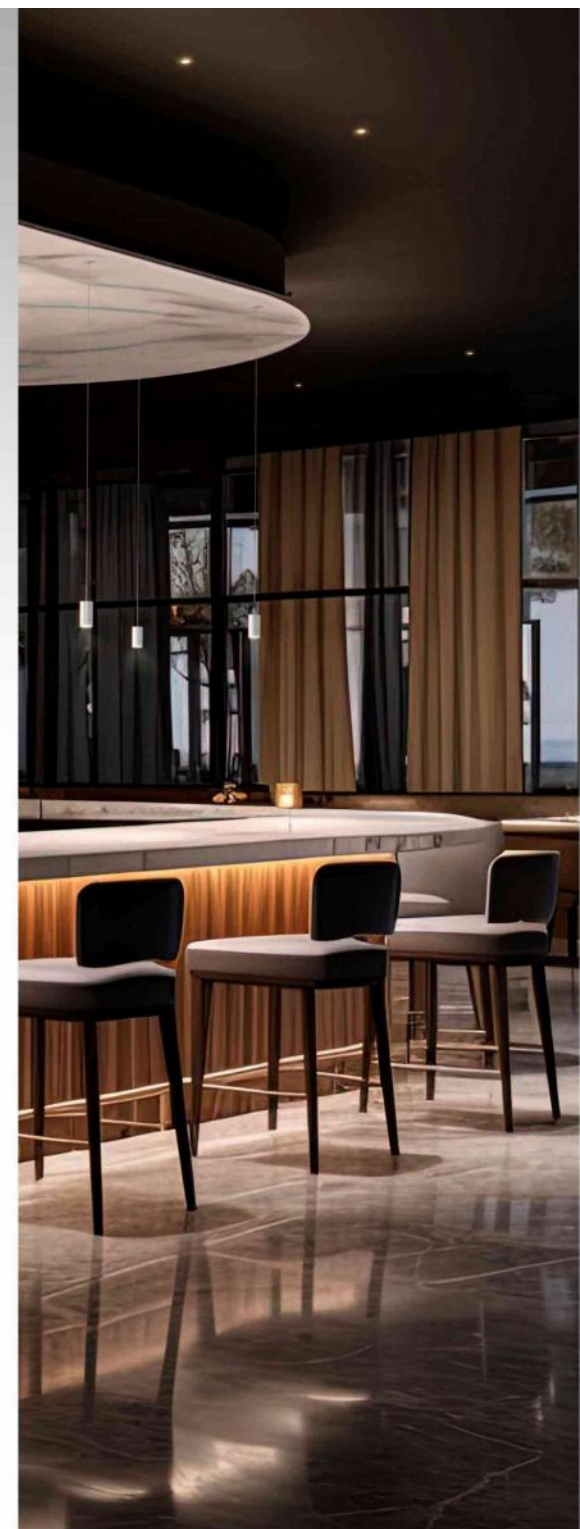

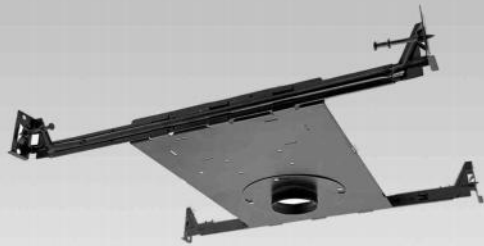

Miniature spotlight




■ Hole size:
1 3/4" (46mm) or 2 1/8" (55mm)
or 2 3/8" (60mm) or 3" (75mm)
or 3 1/8" (80mm).

■ LED Trim kit MAXIMUM WATT:
7W or 9W or 12W

■ Driver Size LxWxH Inch (LxWxH mm) :
9 3/8" L x 1 3/8" W x 1 1/8" H
(237.2x36x29.1mm)



■ Size LxWxH Inch (LxWxH mm) :
14 5/8" L x 11 3/4" W x 3/8" H
(370.9x297.1x10mm)

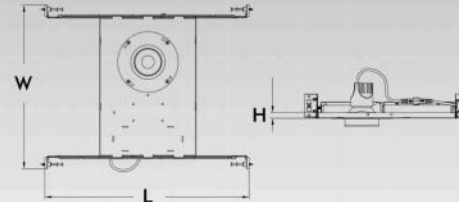

Hole cut size
Φ 1 3/4" (46mm)



EDL207R-30K-24D-TP




EDL207R-30K-24D-YM

9W Wattage

Lumens: 300lm
CCT:3000K
CRI:90
Input Voltage:
120-277V / 60/50Hz



Hole cut size
Φ 2 1/8" (55mm)



EDL205R-30K-24D-TP




EDL207R-30K-24D-TP

7W Wattage

Lumens: 300lm
CCT:3000K
CRI:90
Input Voltage:
120-277V / 60/50Hz




Hole cut size
Φ 2 3/8" (60mm)




EDL207R-30K-24D-TP



EDL204R-30K-24D-YM



EDL206R-30K-24D-YM



EDL205R-30K-24D-YM

7W Wattage

Lumens: 250lm
CCT:3000K
CRI:90
Input Voltage:
120-277V / 60/50Hz



Hole cut size
Φ 3" (75mm)



EDL301R-30K-24D-TP



EDL302R-30K-24D-TP

12W Wattage

Lumens: 700/500lm
CCT:3000K
CRI:90
Input Voltage:
120-277V / 60/50Hz



Hole cut size
Φ 3 1/8" (80mm)



EDL301R-30K-24D-YM



EDL302R-30K-24D-YM

12W Wattage

Lumens: 700/500lm
CCT:3000K
CRI:90
Input Voltage:
120-277V / 60/50Hz





Miniature spotlight

■ Power & Lumen & CRI & CCT(Single CCT)

7W	250lm	90	3000K
12W	700lm	90	3000K


■ Hole cut size

Φ 2- 3/8"(60mm) / Φ 3- 1/8"(78mm)



■ Size



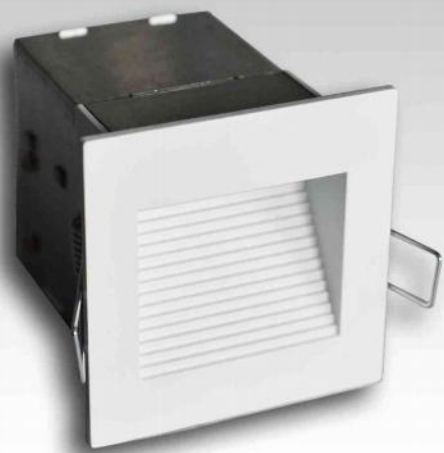


LED Step Light

■ SNAP TRIM




SN



ORB



BK

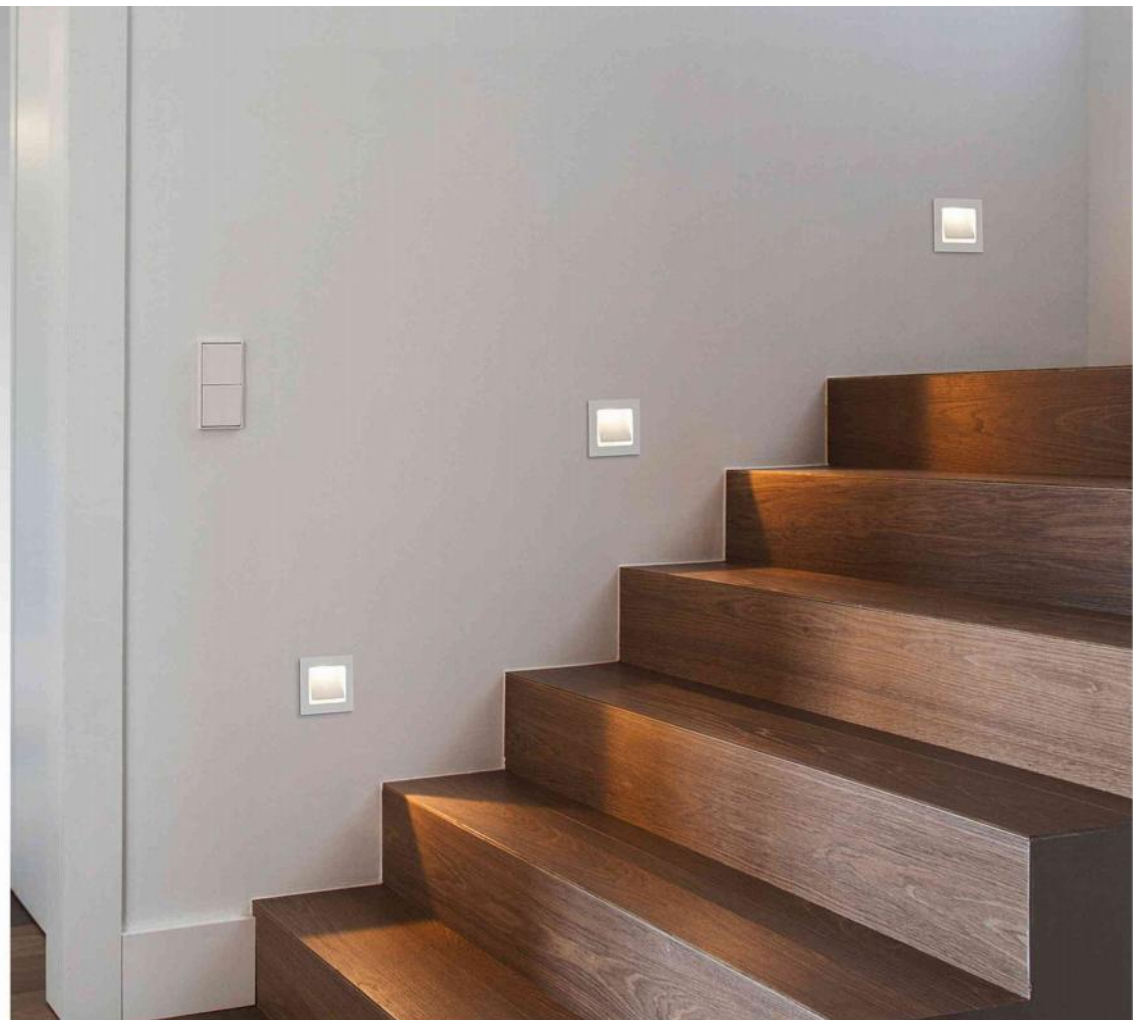

■ Size & Power & Lumen


SL104 1W 50lm

■ Model LxWxH inch(LxWxHmm)

SL104 3.08x3.01x3.19 inch(78.2x76.4x81mm)


■ CCT(Single CCT)

2700K/3000K/4000K/5000K

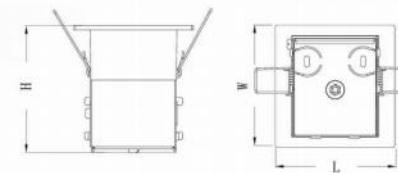




3" LED DownLight

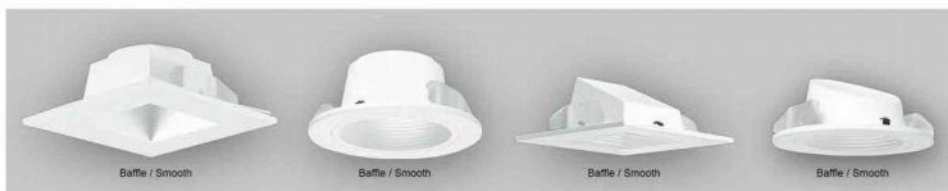

■ Size & Power & Lumen

3"	14.7W	1100lm
3"	21W	1450lm


■ BEAM SPREADS



■ CCT(Single CCT)

2700K/3000K/3500K/4000K/5000K

■ **Ground air vent 3"** (CFK3)

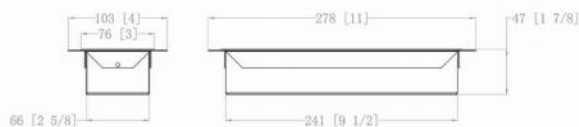

PRODUCT COLOR:



White



Grey



Black




Golden



Nickel

■ **Ground air vent 4"** (CFK4)



PRODUCT COLOR:



White



Grey



Black




Golden



Nickel

■ **Ceiling/Wall air vent 4"** (CFK4-C)

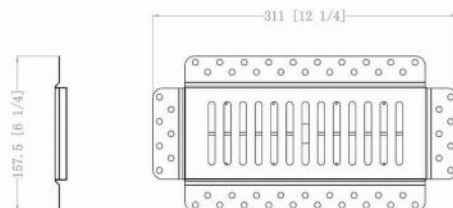


■ **Ceiling/Wall air vent 4"** (CFK4-J)



■ **Ceiling/Wall air vent 8"** (CFK8-C)







■ **Ceiling/Wall air vent 14"** (CFK14-J)





■ **Ceiling/Wall air vent 30"** (CFK30-J)




■ **Ceiling/Wall air vent 30"** (CFK30-C)

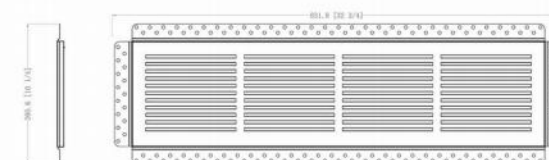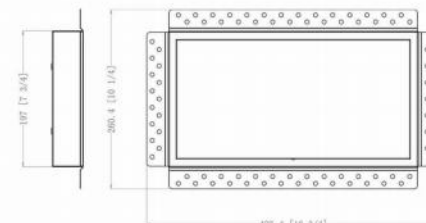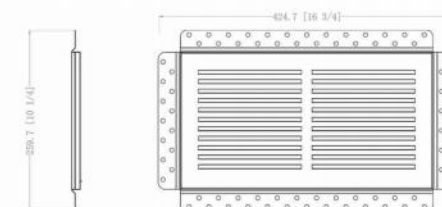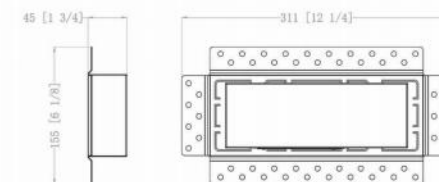


- Return grille 8"x 8"





- Return grille 8"x 10"




- Return grille 8"x 12"




- Return grille 8"x 14"




- Return grille 8"x 16"




- Return grille 8"x 30"




- Return grille 10"x 14"



- Return grille 10"x 16"



- Return grille 10"x 30"



■ 4" Baffle Snap Trim



■ 4" Smooth Snap Trim



■ 6" Baffle Snap Trim



■ 6" Smooth Snap Trim



■ 4" Baffle Snap Trim



■ 4" Smooth Snap Trim



■ 6" Baffle Snap Trim




■ 6" Smooth Snap Trim




FRAMES:


Frames 090




Frames 004




Frames 085




Frames 022




Frames 081




Frames 089

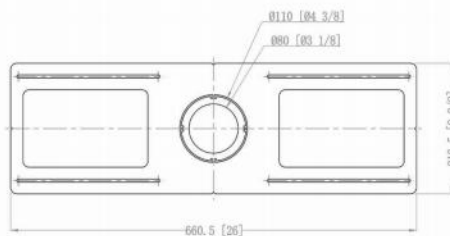


Frames 071

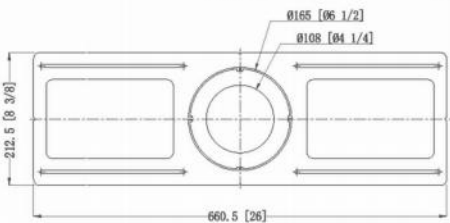


Frames 071-1

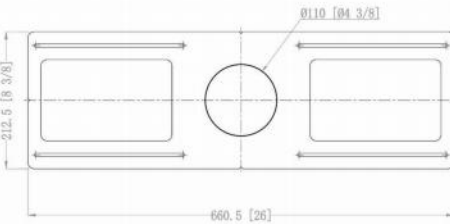

Frames 071-2


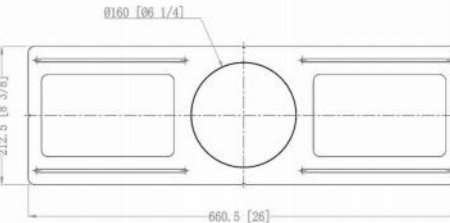


Frames 080


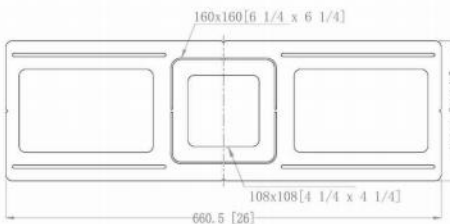


■ FRAMES:



KJ-032 Cutout $2\frac{3}{8}" \times 2\frac{5}{8}"$





KJ-027 Cutout diameter $3\frac{1}{4}"$




KJ-024 Cutout diameter $3\frac{7}{8}"$

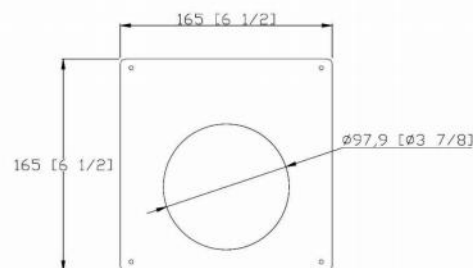



KJ-026 Cutout diameter $4\frac{1}{4}"$

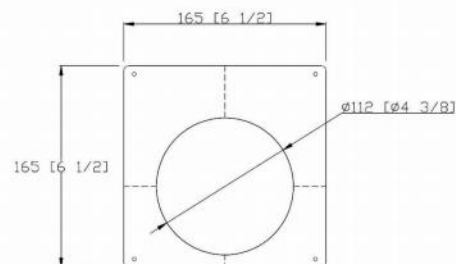


KJ-025 Cutout diameter $4\frac{1}{4}"$



KJ-029 Cutout diameter $3\frac{3}{4}"$

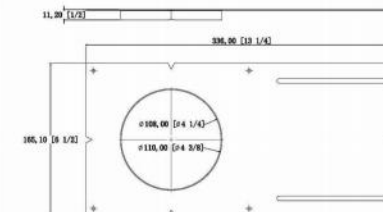

KJ-028 Cutout diameter $4\frac{1}{2}"$



■ EXTENSION CABLE:



018



019

■ ADAPTER:



E26 Adapter



GU10 Adapter