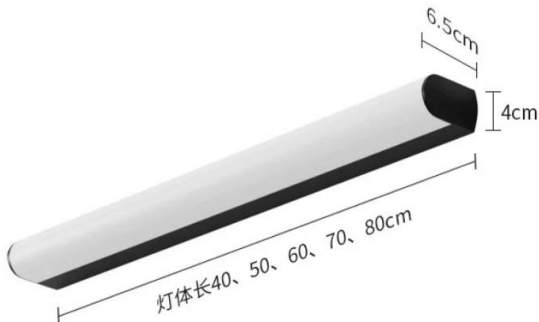
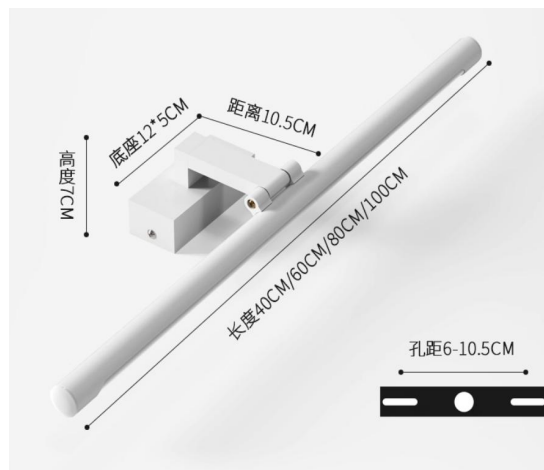


Light name	mirror front light		
Model#	Flip chart stand		
Lamp Picture		Product Size	
			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum + PC	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	black / silver	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	800mm	Controlmode	white
Cutout	Adjustable within 760mm	Place of use	Bathroom

Model#	012- Top payment of cabinet	Installation Site	Above the mirror cabinet
Lamp Picture		Product Size	



Luminaire Performance		Lamp Performance	
Description	Aluminum+Iron	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	Black/White/silvery	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	800mm	Controlmode	white
Cutout	60-105mm	Place of use	Bathroom

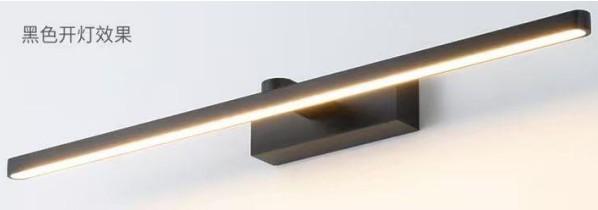
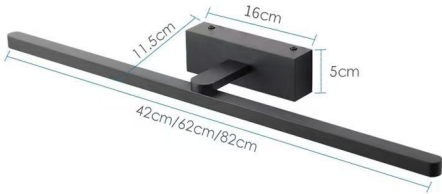
Model#	8014	Installation Site	wall
Lamp Picture		Product Size	

			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum+Iron	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	Black/White/silvery	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	800mm	Controlmode	white
Cutout	70-150mm	Place of use	Bathroom/Take pictures

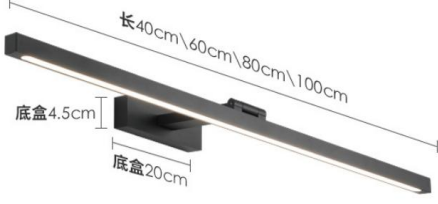
Model#	/028	Installation Site	wall
Lamp Picture		Product Size	

			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum+Iron	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	12W
		CCT	3000K
		Life	80000
Colour	Black/White	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	780mm	Controlmode	white
Cutout	70-150mm	Place of use	Bathroom/Take pictures

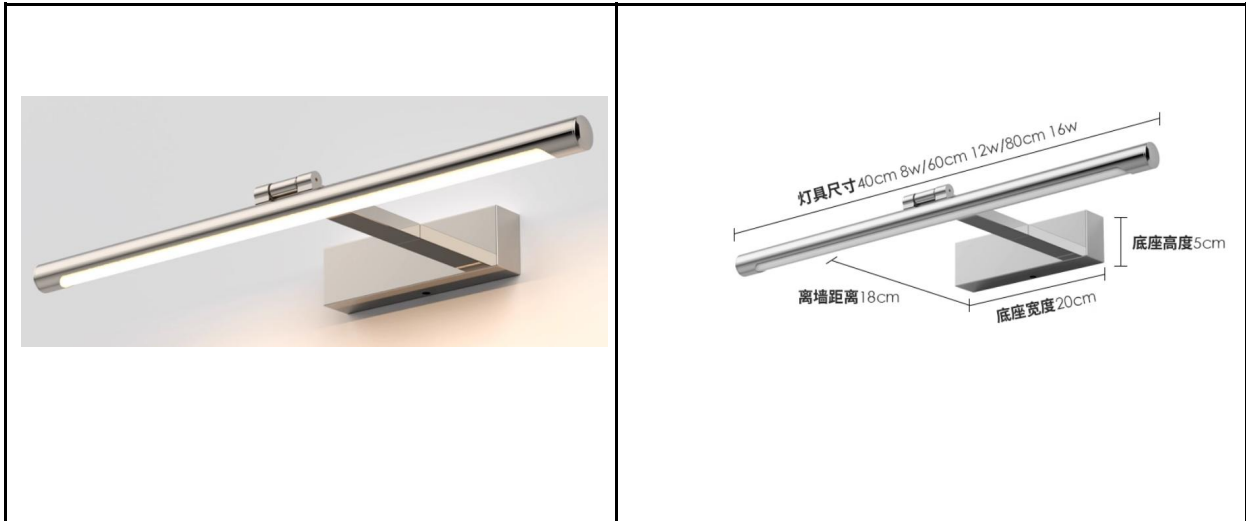
Light name	mirror front light		
Model#	/014	Installation Site	wall
Manufacturer		Contact Person	
Lamp Picture		Product Size	

			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum+Iron	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	Black/White	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	820mm	Controlmode	white
Cutout	100mm	Place of use	Bathroom/Take pictures

Model#	8012-Square pipe	Installation Site	wall
Lamp Picture		Product Size	

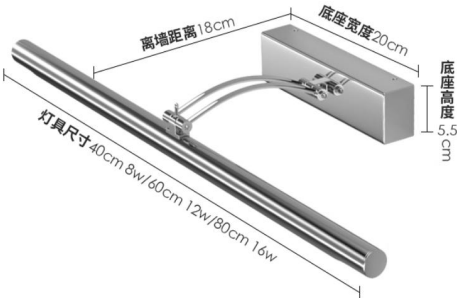
			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	Black/White/silvery	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	800mm	Controlmode	white
Cutout	70-150mm	Place of use	Bathroom/Take pictures

Model#	8012-Round pipe	Installation Site	wall
Lamp Picture		Product Size	

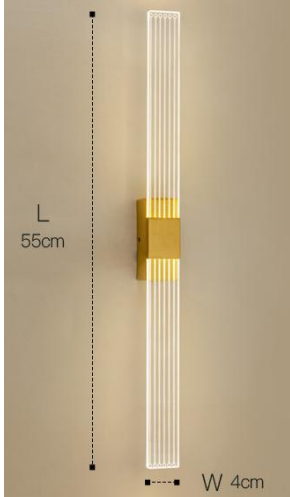


Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	Black/White/silvery	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	800mm	Controlmode	white
Cutout	70-150mm	Place of use	Bathroom/Take pictures

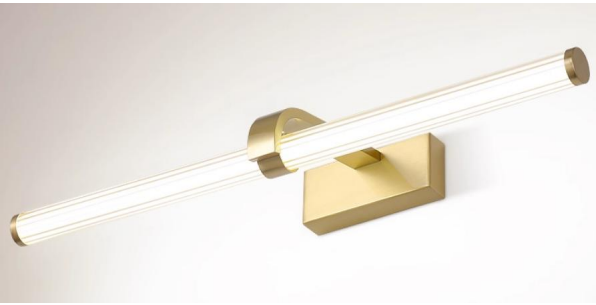
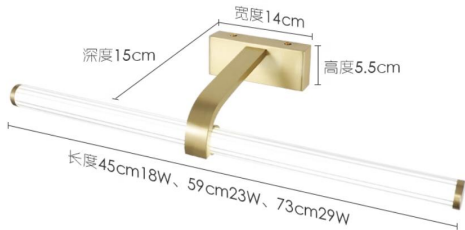
Model#	8003	Installation Site	wall
Lamp Picture		Product Size	

			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	Black/White/silvery	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	800mm	Controlmode	white
Cutout	70-150mm	Place of use	Bathroom/Take pictures

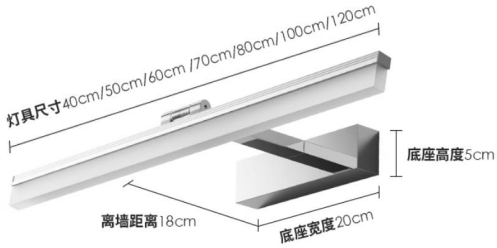
Model#	1661	Installation Site	wall
Lamp Picture		Product Size	

			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	All copper	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	6W
		CCT	3000K
		Life	80000
Colour	Black/Gold	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	550mm	Controlmode	white
Cutout	80mm	Place of use	Bathroom/Take pictures

Model#	1740	Installation Site	wall
Lamp Picture		Product Size	

			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	All copper	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	29W
		CCT	3000K
		Life	80000
Colour	Black/Gold	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	730mm	Controlmode	white
Cutout	80mm	Place of use	Bathroom/Take pictures

Model#	/013	Installation Site	wall
Lamp Picture (		Product Size	

			
Luminaire Performance(Necessary parameters)		Lamp Performance (Necessary parameters)	
Description	Aluminum	LED Chip	SMD2835
		LED Drvier	PHOTPELECTRIC
		Power	13W
		CCT	3000K
		Life	80000
Colour	Black/White/silvery	CRI	80
IP Rated	IP20	SDCM	> 5
Bean angle	120°	Installation mode	Punch installation
Input Voltage	AC100-265V	Driver	Constant Voltage Driver
Dimmension	800mm	Controlmode	white
Cutout	70-150mm	Place of use	Bathroom/Take pictures